


## GT OTC245 23.6 Inch Curved Touchmonitor (C-type)



With C Type format, FHD, GT Curved Touch Monitors, allow for more impressive visual contents and captivating play. Sleek appearance, engaging visuals and accurate PCAP multi-touch experience let excited players immerse into the gaming atmosphere and enjoyment. It's an ideal touch solution widely used in the gaming, casino and sports betting.

### Features & Benefits

- Unique Industrial-grade Design
- Curved 1500R Comfortable Viewing Experience
- Short Side Bending
- Accurate PCAP Multi-touch Technology
- External VESA Mounting
- Edge-to-edge Design, Easy to Clean
- Customization Possible

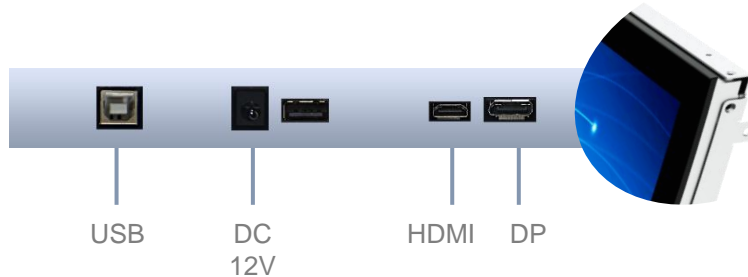

### Applications

- Gaming
- Bar Top
- Roulette

## SPECIFICATIONS

Name	23.6 Inch Curved Open Frame Touchmonitor (C-type)
Model	OTC245-RC5000-UD3200-1.0
<b>LCD Panel Parameters</b>	
Display Technology	Active Matrix TFT-LCD With LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	521.40 mm × 293.28 mm
Native Resolution	1920 × 1080 @ 60 Hz
Response Time (Typ.)	20 ms
Display Colors	16.7 M
Luminance (Typ.)	300 nits
Contrast Ratio (Typ.)	3000:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
<b>Touch Screen Parameters</b>	
Touch Technology	Projected Capacitive (PCAP)
Surface Treatment	Tempered or Chemically Strengthened
Thickness (Total)	4.5 mm
Light Transmission	≥ 83%
Response Time (Typ.)	10 ms
Touch Screen Interface	USB
Touch Point	10
<b>Overall Parameters</b>	
Case/Bezel Color	Gray
Radius	1500 R (short side bending)
Mounting Options	VESA: 100 mm × 100 mm, 75 mm × 75 mm; Side mounting
Outline Dimensions (W×H×D)	564.0 mm × 335.2 mm × 64.3 mm
Power Supply	Input Voltage Range: +12 VDC ± 5%
On Screen Display (OSD)	Control (back ): Power, Auto, Up, Down, Menu
Power Consumption (Max.)	36 W
System Support	Windows 7 or later, Linux 4.4 or later
Operating Altitude	≤ 3000 m

Temperature Range	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
I/O	HDMI, DP, USB (Type B)
Accessories	Optional
Carton Box Dimensions (1 unit in one carton)	695 mm (L) × 245 mm (W) × 475 mm (H)
Weight	Net: 6.6 kg Gross: 9.6 kg
MTBF	50,000 hours demonstrated
Agency Approvals	CE, FCC
Warranty	1 year

Ordering Information		
Model	Part Number	Description
OTC245-RC5000-UD3200-1.0		23.6" "C type", short side bending, FHD, 16:9, 300 nits, PCAP, USB, HDMI&DP

Contact sales for other options

Optional Accessories		
Model	Part Number	Description
Adaptor	130102978R	KPL-050F-VI 12V/4.17A ,1500mm Ø 2.5 50W
Power Cable		1500mm
USB Cable	130300224R	1500mm, male to male
HDMI Cable	130300881R	1500mm, male to male
DP Cable	130300932R	1500mm, male to male

Go to [www.generaltouch.com](http://www.generaltouch.com) for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: [info@generaltouch.com](mailto:info@generaltouch.com)

<http://www.generaltouch.com>