


GT OTC275 27 Inch Curved Touchmonitor (C-type)



With C Type format, FHD, GT Curved Touch Monitors, allow for more impressive visual contents and captivating play. Sleek appearance, engaging visuals and accurate PCAP multi-touch experience let excited players immerse into the gaming atmosphere and enjoyment. It's an ideal touch solution widely used in the gaming, casino and sports betting.

Features & Benefits

- Unique Industrial-grade Design
- Curved 1500R Comfortable Viewing Experience
- Short Side Bending
- Accurate PCAP Multi-touch Technology
- External VESA Mounting
- Edge-to-edge Design, Easy to Clean
- Customization Possible

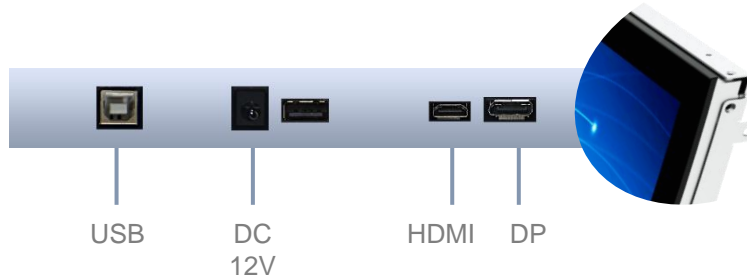

Applications

- Gaming
- Bar Top
- Roulette

SPECIFICATIONS

Name	27 Inch Curved Open Frame Touchmonitor (C-type)
Model	OTC275-RC5000-UD3200-1.0
LCD Panel Parameters	
Display Technology	Active Matrix TFT-LCD With LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	596.74 mm × 335.66 mm
Native Resolution	1920 × 1080 @ 60 Hz
Response Time (Typ.)	15 ms
Display Colors	16.7 M
Luminance (Typ.)	500 nits
Contrast Ratio (Typ.)	3000:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
Touch Screen Parameters	
Touch Technology	Projected Capacitive (PCAP)
Surface Treatment	Tempered or Chemically Strengthened
Thickness (Total)	4.5 mm
Light Transmission	≥ 83%
Response Time (Typ.)	10 ms
Touch Screen Interface	USB
Touch Point	10
Overall Parameters	
Case/Bezel Color	Gray
Radius	1500 R (short side bending)
Mounting Options	VESA: 100 mm × 100 mm, 75 mm × 75 mm; Side mounting
Outline Dimensions (W×H×D)	638.2 mm × 376.6 mm × 68.5 mm
Power Supply	Input Voltage Range: +12 VDC ± 5%
On Screen Display (OSD)	Control (back): Power, Auto, Up, Down, Menu
Power Consumption (Max.)	36 W
System Support	Windows 7 or later, Linux 4.4 or later
Operating Altitude	≤ 3000 m

Temperature Range	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
I/O	HDMI, DP, USB (Type B)
Accessories	Optional
Carton Box Dimensions (1 unit in one carton)	770 mm (L) × 205 mm (W) × 515 mm (H)
Weight	Net: 9 kg Gross: 10.8 kg
MTBF	50,000 hours demonstrated
Agency Approvals	CE, FCC
Warranty	1 year

Ordering Information		
Model	Part Number	Description
OTC275-RC5000-UD3200-1.0		27" "C type", short side bending, FHD, 16:9, 500 nits, PCAP, USB, HDMI&DP

Contact sales for other options

Optional Accessories		
Model	Part Number	Description
Adaptor	130102978R	KPL-050F-VI 12 V/4.17A ,1500 mm Ø 2.5 50 W
Power Cable		1500 mm
USB Cable	130300224R	1500 mm, male to male
HDMI Cable	130300881R	1500 mm, male to male
DP Cable	130300932R	1500 mm, male to male

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>