




## GT OTC557 55 Inch LED-Framed Curved Touchmonitor (C-type)

With C Type format, 4K UHD, vibrant colors, GT LED-Framed Curved Touch Monitors, allow for more impressive visual contents and captivating play. Sleek appearance, engaging visuals and accurate PCAP multi-touch experience let excited players immerse into the gaming atmosphere and enjoyment. It's an ideal touch solution widely used in the gaming, casino and sports betting.

### Features & Benefits

- Unique Industrial-grade Design
- Curved 1500R Comfortable Viewing Experience
- Accurate PCAP Multi-touch Technology
- RGB/Addressable Modes
- 4K Resolution
- External VESA Mounting, Portrait or Landscape
- Edge-to-edge Design, Easy to Clean
- Customization Possible

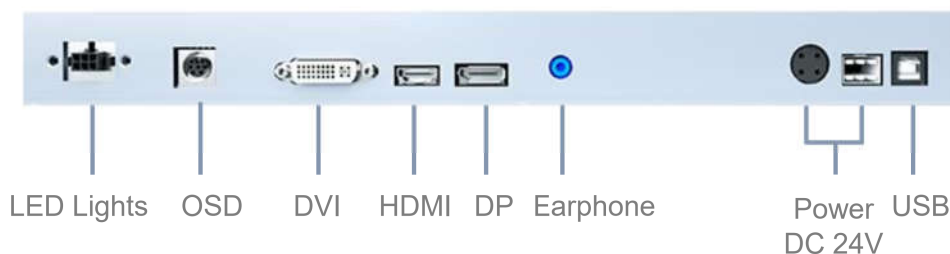

### Applications

- Gaming
- SLOT
- Casino

## SPECIFICATIONS

|                            |  |
|----------------------------|--|
| Name                       | 55 Inch LED-Framed Curved Touchmonitor (C-type)  |
| Model                      | OTC557-RC5000-UD5440-2.0   |
| LCD Panel Parameters       |  |
| Display Technology         | Active Matrix TFT-LCD With LED Backlight   |
| Aspect Ratio               | 16:9   |
| Active Area (W x H)        | 1209.6×680.4mm   |
| Native Resolution          | 3840×2160@60Hz   |
| Response Time (Typ.)       | 8ms  |
| Display Colors             | 1.07B  |
| Luminance (Typ.)           | 500nits  |
| Contrast Ratio (Typ.)      | 4000:1   |
| Viewing Angle (Typ.)       | Horizontal (left/right) CR≥10 89°/89°  |
|                            | Vertical (up/down) CR≥10 89°/89°   |
| Touch Screen Parameters    |  |
| Touch Technology           | Projected Capacitive (PCAP)  |
| Surface Treatment          | Tempered or Chemically Strengthened  |
| Thickness (Total)          | 4.5±0.5mm  |
| Light Transmission         | ≥83%   |
| Response Time (Typ.)       | 10ms   |
| Touch Screen Interface     | USB  |
| Touch Point                | 10   |
| Overall Parameters         |  |
| Case/Bezel Color           | Black  |
| Radius                     | 1500R  |
| Mounting Options           | VESA: 600×400 mm   |
| Outline Dimensions (W×H×D) | 1270.6mm × 768.9mm × 206.1mm   |
| Power Supply               | Monitor: Input Voltage Range: +24VDC ± 5%<br>RGB LED Lights: +12VDC ± 5%<br>Optional LED controller(External): +12VDC ± 5% |
| On Screen Display (OSD)    | Control (remote): Power, Auto, Up, Down, Menu  |
| Power Consumption (Max.)   | 150W ( Monitor without RGB LED Lights)<br>40W (RGB LED Lights)   |
| Operating Altitude         | ≤3000m   |
| System support             | Win7 or later, Linux 4.4 or later  |

|   |  |
|---|--|
| Temperature Range                               | Operating: 0°C to 40°C, storage: -20°C to 60°C |
| Humidity (Non Condensing)                       | Operating: 20% to 80%, storage: 10% to 90%     |
| I/O   | HDMI, DVI, DP, USB (Type B)                    |
| Accessories                                     | Optional                                       |
| Carton Box Dimensions<br>(1 unit in one carton) | TBD mm (L) × TBD mm (W) × TBD mm (H)           |
| Weight  | TBD  |
| MTBF  | 50,000 hours demonstrated                      |
| LED Lights Color                                | Multicolor                                     |
| LED Lights Location                             | 4 LED lights bar (Front, Edge, Back)           |
| LED controller (External)                       | Optional                                       |
| Agency Approvals                                | CE, FCC  |
| Warranty  | 1 year   |

#### Ordering Information

| Model                    | Part Number | Description  |
|--------------------------|-------------|--|
| OTC557-RC5000-UD5440-2.0 |             | 55" "C type", 16:9, 500nits, PCAP, USB, HDMI/DVI/DP, LED lights, front & edge & back |

Contact sales for other options

#### Optional Accessories

| Model              | Part Number | Description  |
|--------------------|-------------|--|
| Adaptor            | 130104171R  | G99-KEP150M-N001 Input:100-240V(VAC)-Output :24(VDC)-6.25A-150W-4PIN |
| Power Cable        |             | 1500mm   |
| USB Cable          | 130300224R  | USB Cable, 1500mm, male to male                                      |
| DVI Cable          | 130300720R  | DVI Cable, 1500mm ,male to male                                      |
| HDMI Cable         | 130300881R  | 1500mm   |
| DP Cable           | 130300932R  | 1500mm   |
| LED Controller Kit | 110200887R  | LED Controller Kit 50W   |

Go to [www.generaltouch.com](http://www.generaltouch.com) for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: [info@generaltouch.com](mailto:info@generaltouch.com)

<http://www.generaltouch.com>