




32 Inch Closed Frame Touch Monitor

OTL324 is a LED lights bar Touchmonitor, As GT's 4th generation PCAP LED lights bar touch monitor solution is ideal not only for gaming applications but also for those small and large interactive digital signage displays where fast, accurate and sensitive touch solution is required. The LED lights can be controlled by the OEM operating system or an external LED driver to achieve desired color combinations. These monitors are available if you want to attract customers to the latest, largest and most exciting gaming experience possible.

Features & Benefits

- High-quality PCB-mounted LEDs, no dark corners
- LED lights bar for surrounding display
- RGB LED light bar available
- True-flat, black closed-frame designs
- 10-touch PCAP for windows 7 or later, Linux 4.4 or later

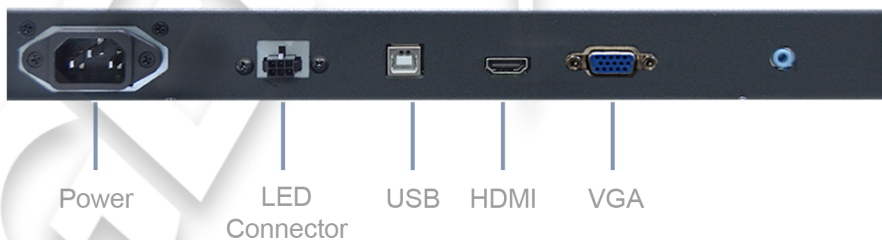

Applications

- Gaming
- SLOT
- Casino

SPECIFICATIONS

Name	32 Inch LED Lights Bar Closed Frame Touch Monitor
Model	OTL324
LCD Panel Parameters	
Display Technology	Active Matrix TFT-LCD with LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	698.40×392.85mm
Native Resolution	1920×1080@60Hz
Response Time (Typ.)	8ms
Display Colors	16.7M
Luminance (Typ.)	400nits
Contrast Ratio (Typ.)	1200:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
Touch Screen Parameters	
Touch Technology	Projected Capacitive (PCAP)
Surface Treatment	Tempered or Chemically Strengthened Optional: Anti-Glare
Thickness(Total)	5.3mm
Light Transmission	≥83%
Response Time (Typ.)	10ms
Touch Screen Interface	USB
Touch Point	10
Overall Parameters	
Case/Bezel Color	Black
Mounting Options	VESA: 200×200 mm
Outline Dimensions (W×H×D)	772.5mm × 473.1mm× 65.1mm
Power Supply	Monitor: Input Voltage Range: 100-240V AC, 50-60 Hz RGB LED Lights: +5VDC ± 5% Optional LED controller(External): +5VDC ± 5%
On Screen Display (OSD)	Control (back): Power, Auto, Up, Down, Menu
Power Consumption (Max.)	60W (Monitor without RGB LED Lights) 30W (RGB LED Lights)
Operating Altitude	≤3000m
System support	Win7 or later, Linux 4.4 or later

Temperature Range	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
I/O	VGA, HDMI, USB (Type B)
Accessories	Optional
Carton Box Dimensions (1 unit in one carton)	905 mm (L) × 215 mm (W) × 580 mm (H)
Weight	Net: 15.1 kg Gross: 18.4 kg
MTBF	50,000 hours demonstrated
LED Lights Color	Multicolor
LED Lights Location	4 LED lights bar (Front)
LED Controller(remote)	Optional
Agency Approvals	CE , FCC
Warranty	1 year

Ordering Information		
Model	Part Number	Description
OTL324-RC6000-UH4F80-1.0		32", 16:9, 400nits, PCAP, USB, VGA/HDMI, LED lights Location front
Optional Accessories		
Model	Part Number	Description
VGA Cable	130300697R	VGA Cable, 1500mm OD5.8 male to male 15PIN, black
USB Cable	130300224R	USB Cable, 1500mm, male to male
HDMI Cable	130300881R	HDMI Cable, 1500mm, 18+1pin, A-male to A-male
LED Controller Kit	110200875R	LED Controller Kit
Power Cable		1500mm

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change , without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>