





GT OTR245 23.6" Circular Closed Frame Touchmonitor

23.6" circular display, with FHD resolution, fast and drift-free 10-point PCAP touch performance, keeps exciting players immersed with captivating play. It is designed specifically for the rigors of gaming environments such as the casino, gaming, and amusement.

Features & Benefits

- Circular display
- FHD resolution 1280 × 1280
- Accurate PCAP Multi-touch Technology
- True Flat and Black Closed-frame Design
- External VESA Mounting
- Plug and Play

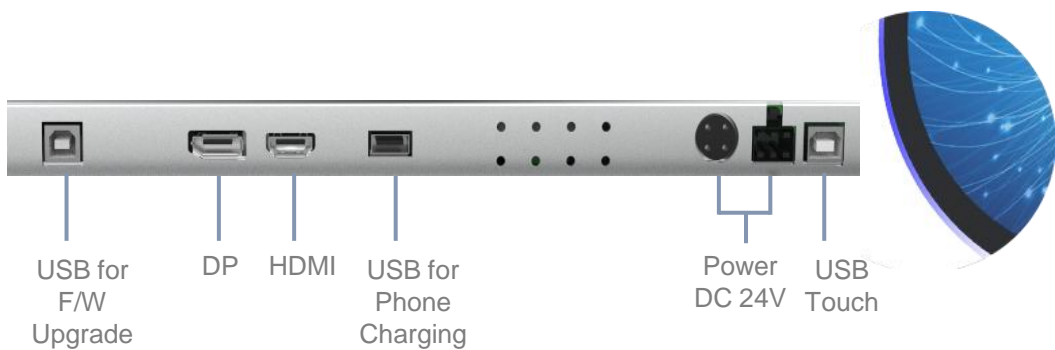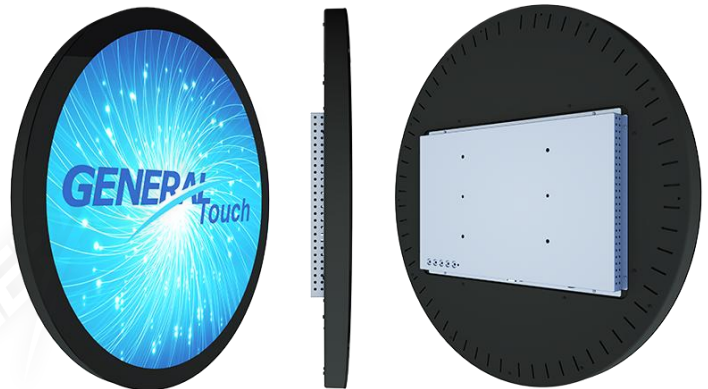

Applications

- Gaming
- SLOT
- Retail

SPECIFICATIONS

Name	23.6 Inch Circular Closed Frame Touchmonitor
Model	OTR245-RC4000-UDBT00-1.0
LCD Panel Parameters	
Display Technology	Active Matrix TFT-LCD with LED Backlight
Aspect Ratio	1:1
Active Area (W x H)	599.42 mm × 599.42 mm
Native Resolution	1280 × 1280 @ 60 Hz
Response Time (Typ.)	14 ms
Display Colors	16.7 M
Luminance (Typ.)	1500 nits
Contrast Ratio (Typ.)	1000:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
Touch Screen Parameters	
Touch Technology	Projected Capacitive (PCAP)
Surface Treatment	Tempered or Chemically Strengthened Optional: Anti-Glare
Thickness (Total)	3.5 mm
Light Transmission	≥ 83%
Response Time (Typ.)	10 ms
Touch Screen Interface	USB
Touch Point	10
Overall Parameters	
Case/Bezel Color	Rear shell: Black Shield: Gray
Mounting Options	VESA: 200 mm × 150 mm
Outline Dimensions (W×H×D)	674.6 mm × 674.6 mm × 55.6 mm (φ674.6 mm)
Power Supply	Input Voltage Range: +24 VDC ± 5%
On Screen Display (OSD)	Control (back): Power, Auto, Up, Down, Menu
Power Consumption (Max.)	100 W
Operating Altitude	≤ 3000 m
System support (PCAP)	Win7 or later, Linux 4.4 or later

Temperature Range	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
I/O	HDMI, DP, USB (Type B)
Accessories	Optional
Carton Box Dimensions (1 unit in one carton)	785 mm (L) × 785 mm (W) × 185 mm (H)
Weight	Net: 11.9 kg Gross: 17.6 kg
MTBF	50,000 hours demonstrated
Agency Approvals	CE, FCC
Warranty	3 years

Ordering Information

Model	Part Number	Description
OTR245-RC4000-UDBT00-1.0	10202010567R	23.6", circular, 1:1, 1500 nits, PCAP, USB, HDMI & DP

Optional Accessories

Model	Part Number	Description
USB Cable	30302050006R	USB Cable A Male-B Male 1500mm
HDMI Cable	30302030001R	HDMI Cable A Male-A Male 1500mm
DP Cable	30302010001R	DP Cable Male-Male 1500mm
Adaptor	30207010024R	Power Adapter 24V/150W/4 Pin/1200mm
Power Cable		1500 mm

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>