



# Title: RTL326-RPCZ05-UHPDA


Mark	Revised Contents	Signature
△		

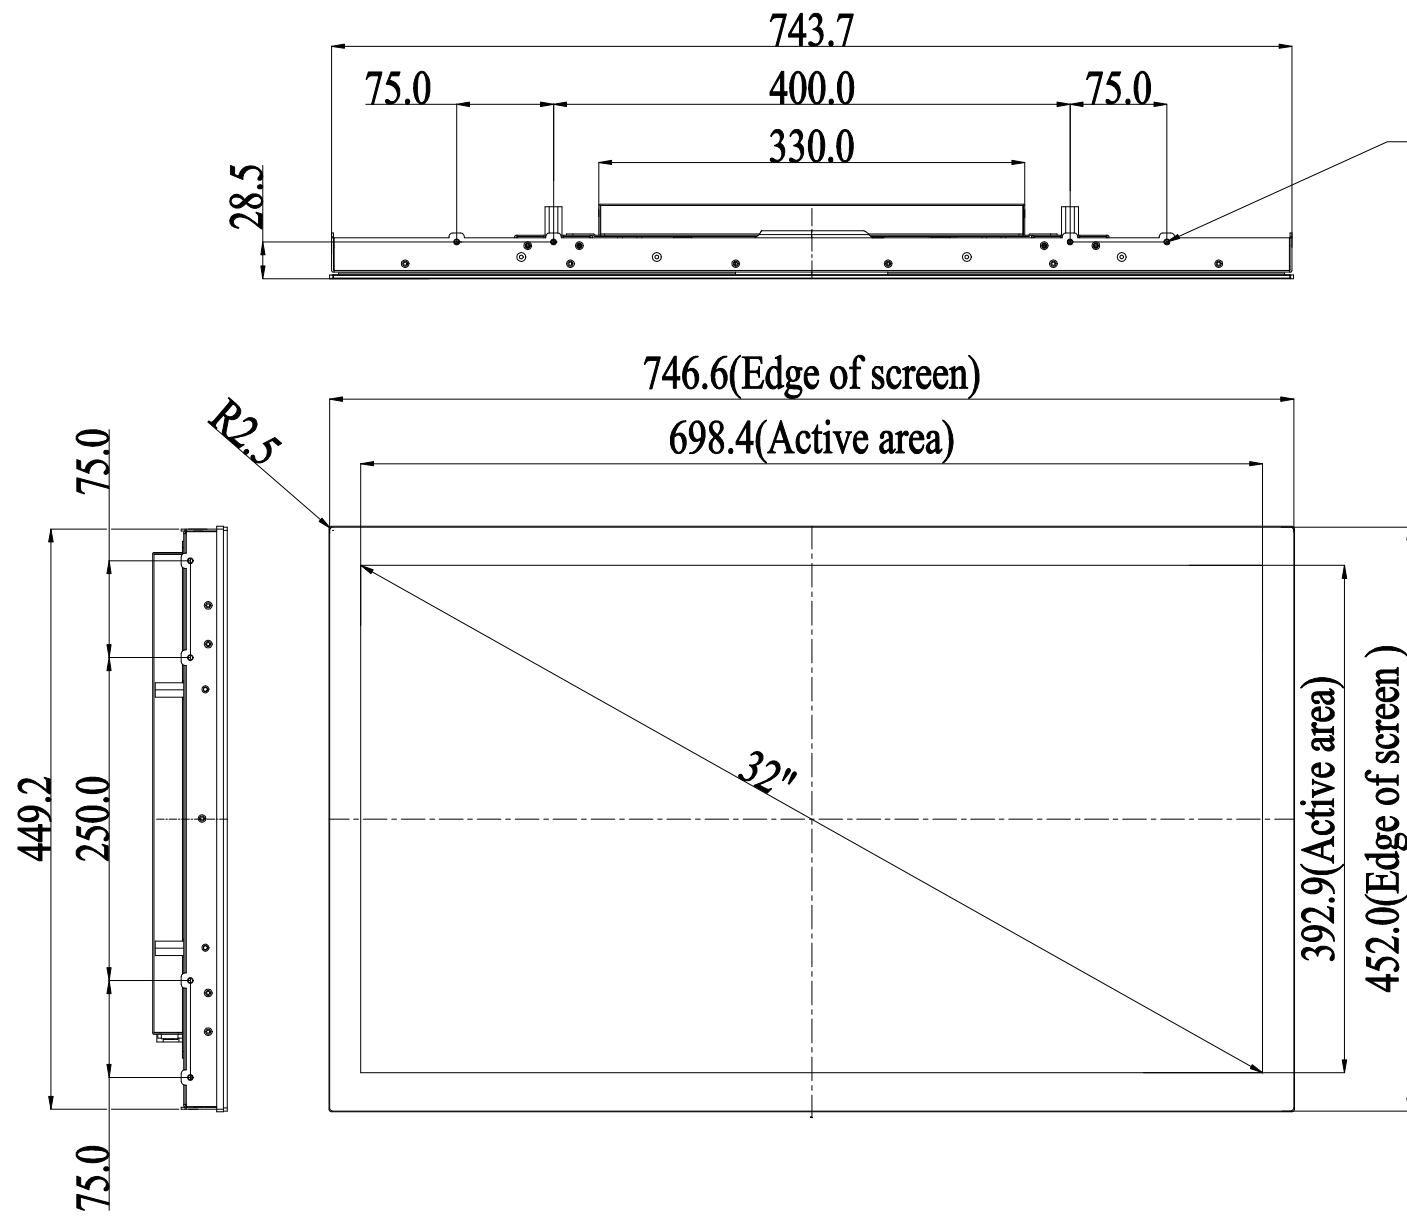



M4 Threads,X8  
Max Screw Depth=8mm  
From Mounting Surface

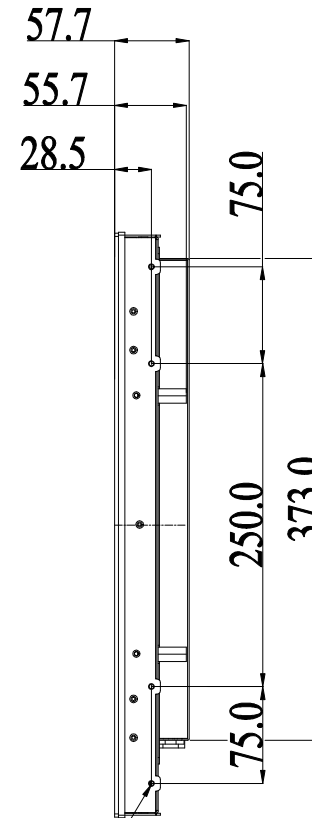

M4 Threads,X4  
Max Screw Depth=8mm  
From Mounting Surface

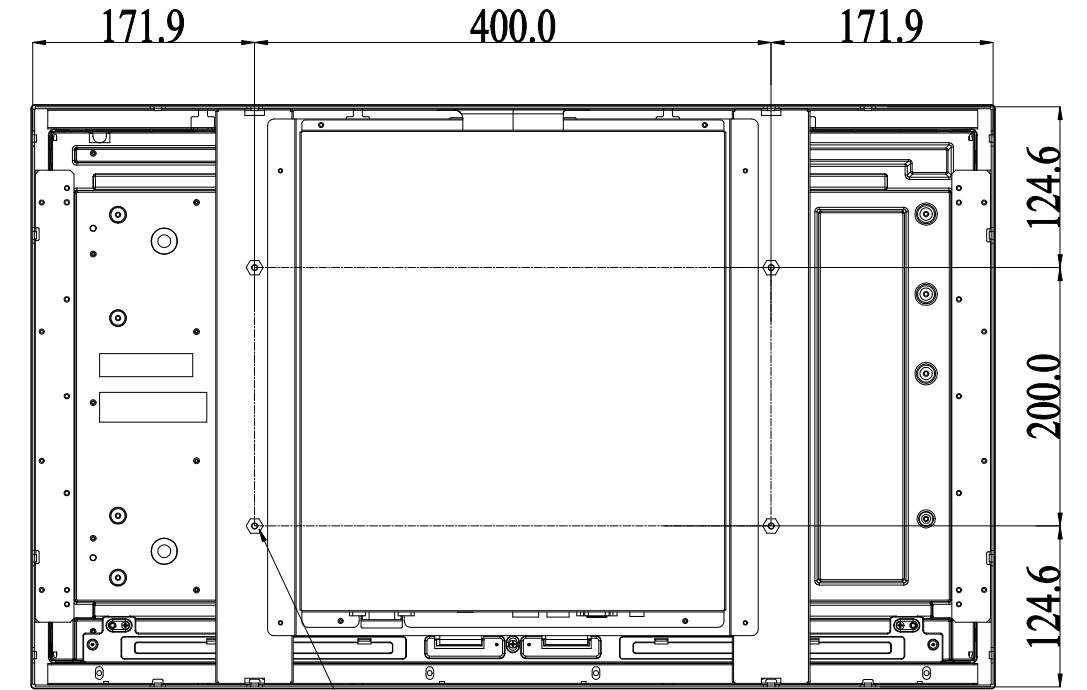

VESA:M6 Threads,X4  
Max Screw Depth=10mm  
From Mounting Surface

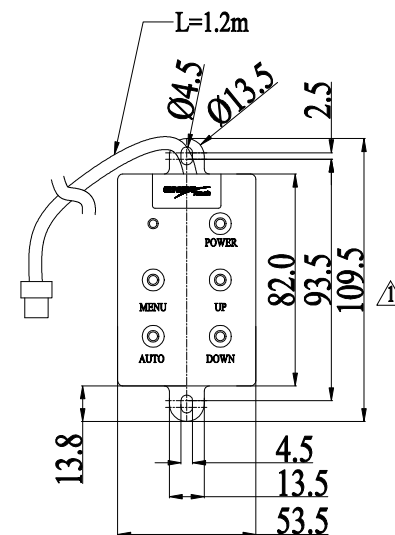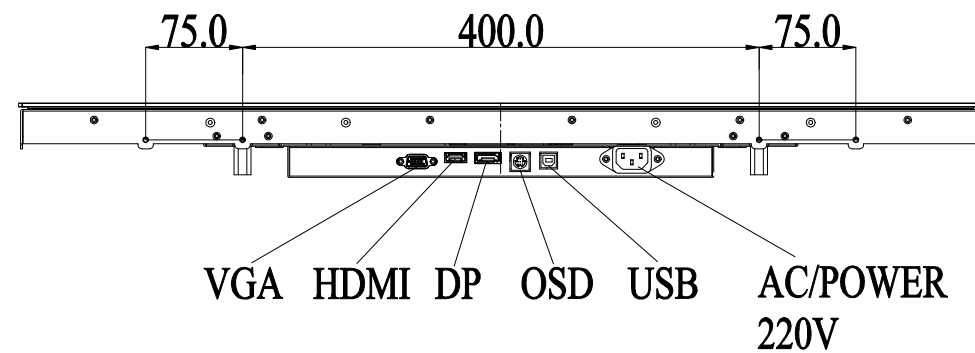

OSD (max thickness =15.5mm)

**ALL DIMENSIONS ARE IN MILLIMETERS**

<b>GENERAL Touch</b>		General Touch Co., Ltd.				
Specification	External Dimensions	746.6*452*55.65	Anti-Glare	Y <input type="checkbox"/> N <input checked="" type="checkbox"/>	DESIGNER: Zhou Rui	
Unit	Date	2021/04/01	DustProof	Y <input type="checkbox"/> N <input checked="" type="checkbox"/>		
mm	Active Area	698.40*392.86	Glass Thickness	3mm	Checked By: Wang Zhenghua	
Projection:	Silk Print Color	Black	Mounting	VESA <input type="checkbox"/> Bracket <input checked="" type="checkbox"/>		
Sheet 1 of 1	Notes				Approved By: Zhou Bolin	
VER: 0.3	Scale: 1:1	Touch Technology	P-CAP	√		SAW
Tolerance: ±1.0mm			IR/PIT			Resistive
			Non-Touch			